

SPECIFICATIONS


Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

2285D 1 XX X N XX S Y X 01

No. of Pins Per Row: 1*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating:
 G1: Gold Flash
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 S0: Gold Flash/Tin
 SN: Tin
 Packing:
 0=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

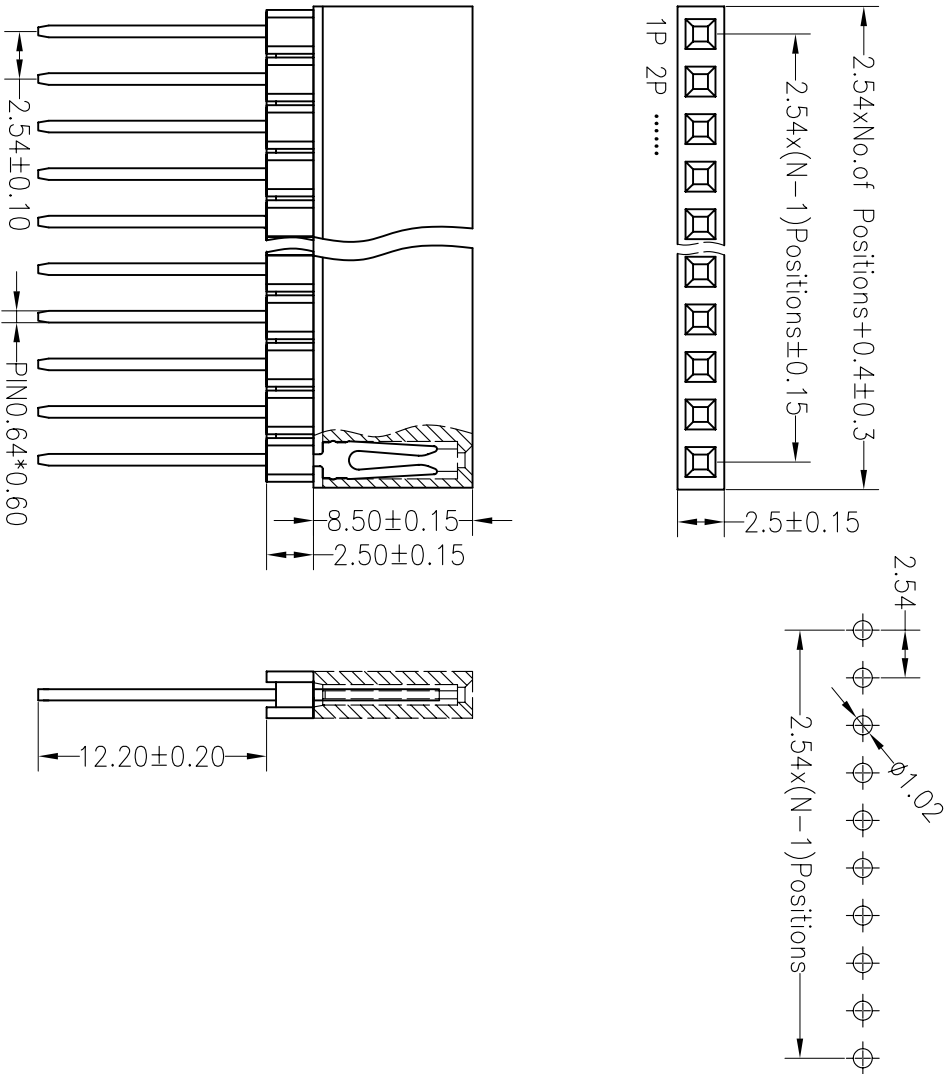

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

OPERATION		DRAW		SCALE		FIT	
X.X		YYSSheng		UNIT		mm	
X.XX		CHECK		SIZE		A4	
X.XXX		APPROVE		SHEET		1/1	
Angle				PROJ.		◆	
±3°				PART NO.		2285D1XXXXXXSYX01	
TOL				TITLE:		2.54PF H8.5mm 1XNpin 180° W2.5mm	

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	