

SPECIFICATIONS

Rated(额定参数): 300V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.2Nm (1.7Lb.in)
 Wire Range(线径):28~16AWG
 Strip length(剥线长度):6~7mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Clamp(方块): Brass(黄铜), Ni plating(镍漆)
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)




	PITCH RANGE		NOMINAL DIMENSION RANGE					
	IN MM		IN MM		IN MM		IN MM	
TO	6	10	10	30	60	100	100	OVER
TO	10	24	30	60	100	150	150	OVER
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00	

Ordering Information

JL15EDGK - 350 XX G X 1

Pitch
 350=3.5PH
 381=3.81PH
 No.of pins
 2P,3P,4P~24P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
 Packing
 O=Pe bag
 A=Troy

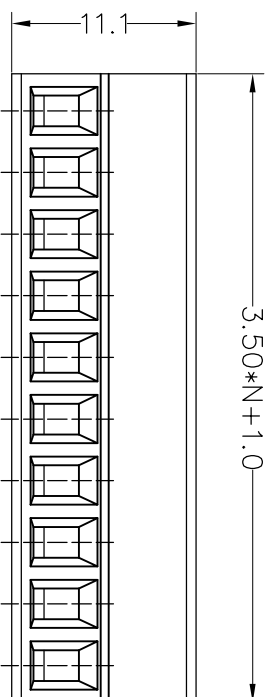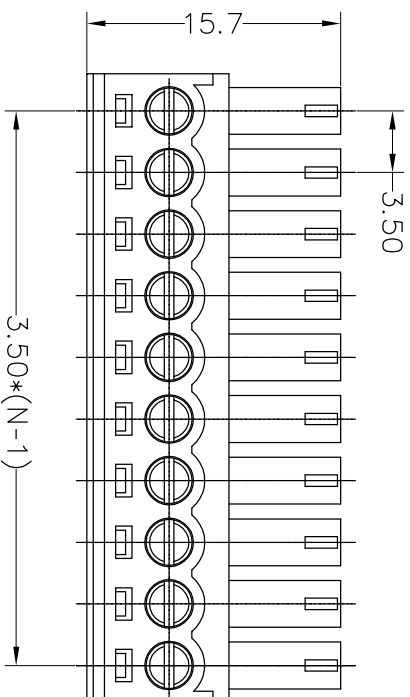

OPERATION		DRAW		SCALE	FIT	PART NO.	
X.X	±0.30	yiyusheng	19.12.09	UNIT	mm	JL15EDGK-350XXGX1	
X.XX	±0.20	CHECK		SIZE	A4	3.50mm Npin Pitch Female	
X.XXX	±0.10			SHEET	1/1	Pluggable Terminal Blocks	
Angle	±3°	APPROVE		PROU.			
DIM	TOL	CHANGE		TITLE:			
1	2	3	4	5	6	7	8
REV	DATE	MODIFICATION DESCRIPTION					
A0	2019.12.09	NEW DRAWING					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992