





SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

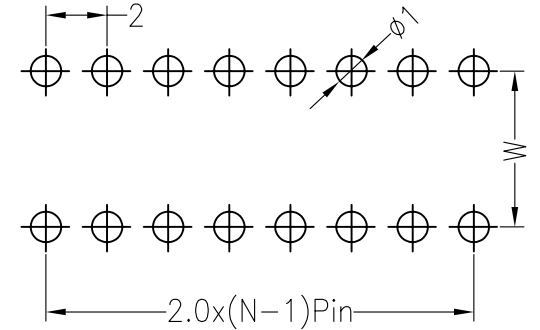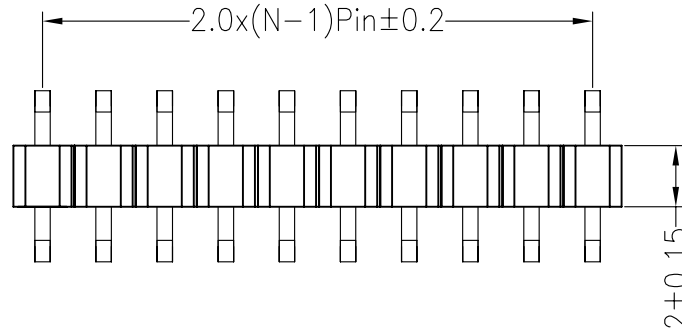

Ordering Information

1320 11 XX X N XX U XXX X 02

- No.of Pins Per Row 1x40 1--40
- Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
- Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
- Pin Length
- Packing
 O=PE Bag
 A=Tray
 T=Tube

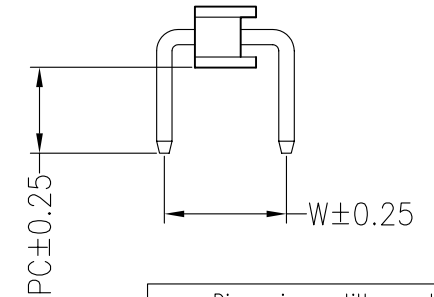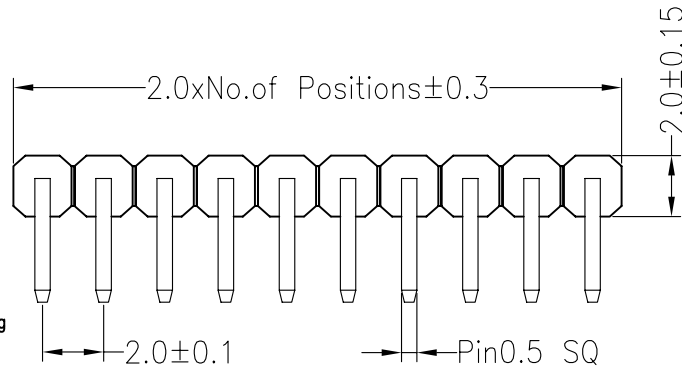

Dimension antitheses list			
ITEM	PC	W	L
Standard	2.80	4.00	11.00
Alternate			

				OPERATION		DRAW	YiYuSheng	12.10.08	SCALE	FIT	JiLN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				CHECK				SIZE	A4	PART NO. 132011XXXNXXUXXX02 TITLE: 2.0PH 1xNpin H2.0mm U-Type		
				APPROVE				SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.				
1	2	3	4	5	6	7	8	9				